

# **THERM-MASTER SECTIONAL SERIES**



**POLYURETHANE INSULATION  
R-VALUES UP TO 24.54**

**ARCAT**

**GIDA**  
International Door Association  
Division of the International Association  
of Door & Access Systems

**CODA** See About Us section in our California  
Door, Track, and Access System Industry  
The California Operator & Door Association

# PRODUCT SPECIFICATIONS

## Section Overview

Insulated Sections fabricated from pre-painted, hot dipped galvanized steel with rigid polyurethane insulation core, CFC and HCFC free, face sheet stucco embossed and rib reinforced

Sections feature thermal break, steel-polyurethane-steel sandwich formed by continuous process

Sections formed with ship-lap joint

Ribbed Profile

Recognized as a standard look on many door systems that are already installed

Porvene can provide matching section replacement options to customers quickly and efficiently

Model	Section Thickness	Face Sheet Profile	Face Sheet Thickness
PV-150	1 1/2" (38mm)	Ribbed	30 Ga. Ext. / Int.
PV-158	1 5/8" (41mm)	Ribbed	30 Ga. Ext. / Int.
PV-200	2" (51mm)	Ribbed	30 Ga. Ext. / Int.
PV-220	2" (51mm)	Ribbed	20 Ga. Ext. / Int.
PV-300	3" (76mm)	Ribbed	20 Ga. Ext. / Int.

Maximum Opening Width  
28'-6" (8717mm)


Maximum Opening Height  
18'-0" (1420mm)

### Finish

Two coat, baked-on paint system on exterior side, prier and polyester finish coat

### Warranty

10 years against delamination of the panels  
1 year on materials and workmanship

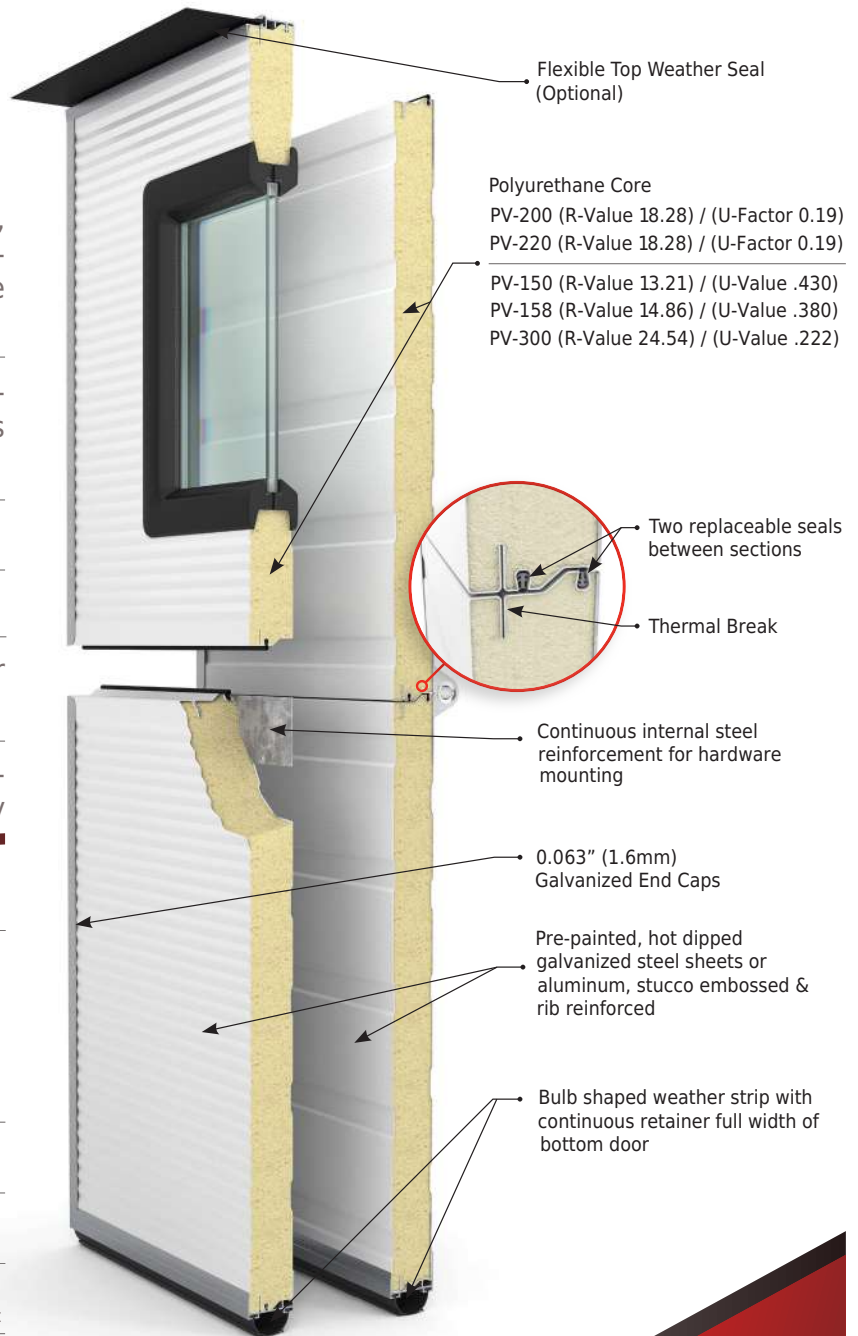

14241 Grant Street  
Moreno Valley, CA 92553  
[www.porvenedoors.com](http://www.porvenedoors.com)  
1 (951) 653-3727

Professionally installed and serviced by: